


市道四拾貫後山線道路修繕工事数量計算総括表

工 種	種 別	規 格	単位	計算数量	設計書数量
土 工					
	掘 削	土砂 小規模	m ³	5.2	6.0
	埋 戻	小規模	m ³	1.9	2.0
	土 砂 等 運 搬	礫質土 L=10.8km	m ³	3.1	4.0
構造物取壊し 工					
	構造物とりこわし		m ³	0.5	0.5
	殻 運 搬	Con殻 L=11.6km	m ³	0.5	0.5
舗装切断工					
	舗装版切断	8.0m×2(両側) 15.0cm以下	m	16.0	16.0
	舗装版破碎	15.0cm以下	m ²	9.0	9.0
	殻 運 搬	アス塊 L=8.2km	m ³	0.4	0.4
舗 装 工					
	路 盤 工	車道 M-30 t=10cm	m ²	4.8	5.0
	表 層 工	車道 再生密粒As13 t=4cm	m ²	4.8	5.0
排 水 工					
	現場打ち集水桝	500×500×800	基	2.0	2.0
	集水桝修繕		式	1.0	1.0
	U型側溝据付け	横断溝 300用	m	8.0	8.0
	蓋版据付け	グレーチング ボルト固定	枚	4.0	4.0
安全処理工					
	交通誘導員		人	2.0	2.0

土量分配表

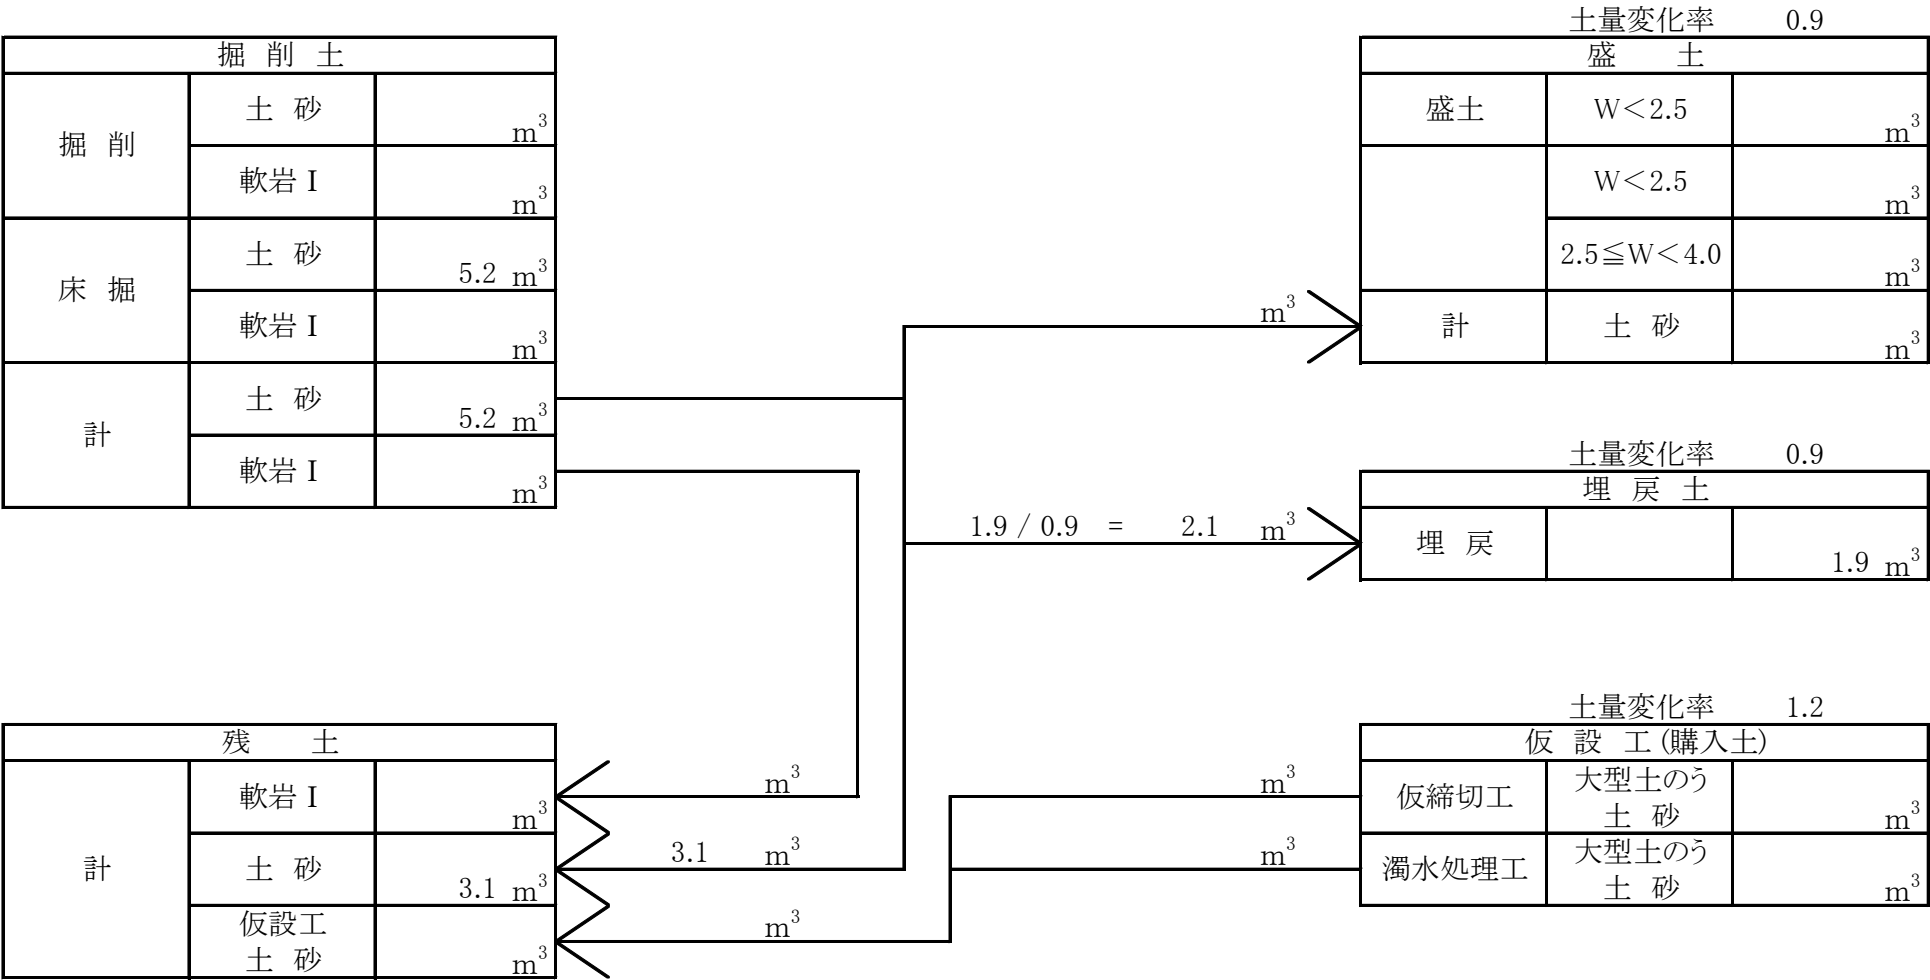

土 工 数 量 計 算 書

[illegible]

測 点	距 離	構造物とりこわし			Con殻運搬			Con殻処分		
				立積	断面	平均	立積			
0.0		右側既設側溝取壊し		0.25						
8.0		左側既設側溝取壊し		0.25			0.50			
計	0.0 m			0.50	m3		0.50		1.2	t

取壊工 数 量 計 算 書	
---------------	--

測点	距離	舗装取壊			As殻運搬			As殻処分		
		幅員	平均	面積	断面	平均	立積			
0.0		1.12			0.05	0.02	0.00			
8.0	8.0	1.12	1.12	9.00	0.05	0.05	0.40			
計	8.0 m			9.00 m ²			0.36		0.8 t	

鋪装工 数 量 計 算 書

測 点	距 離	路盤工			表層工					
		幅員	平均	面積	幅員	平均	面積	面責	平均	面積
0.0		0.60			0.60					
8.0	8.0	0.60	0.60	4.80	0.60	0.60	4.80			
		m		4.80	m2		4.80	m2		0.00

延長数量計算表

舗装切断						
測 点	右	左	計	測 点	延長	延長
0.0						
8.0	8.0	8.0	16.00			
			0.00			
計	8.0	8.0	16.0			